


DPI International
Printing Innovations

MOST VERSATILE

UV FLATBED PRINTER

Layers Printing

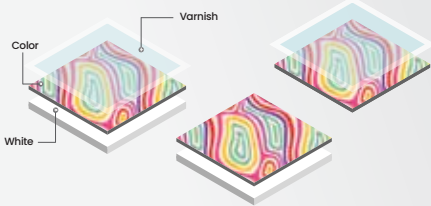

Glass Printing



Door Printing



Acrylic Printing



**F-2513
F-3220**

Technical Specifications

Model	F-2513	F-3220
Max. Printing Size	2500mm x 1300mm	3200mm x 2000mm
Print Technology	Drop on demand micro piezo-electric digital inkjet Printer	
Print Head	Ricoh Gen5 / Ricoh Gen6	
Print Resolution	720 x 1200dpi(Max)	
Print Head Nos	2-4 (optional)	
Optional Color Configuration	CMYK, CMYK W, CMYK WV, Double CMYK, CMYK KV	
Max. Media Thickness	0-100mm	
Print Speed (Express Mode)	720*600dpi-4pass (15*sqm/hr)	720*600dpi-4pass (30*sqm/hr)
Print Speed (Standard Mode)	720*900dpi-6pass (12*sqm/hr)	720*900dpi-6pass (25*sqm/hr)
Print Speed (Quality Mode)	720*1200dpi-8pass (8*sqm/hr)	720*1200dpi-8pass (17*sqm/hr)
Ink Supply System	Negative Pressure Auto Ink Supply	
Drying System	UV Lamps Instant Drying	
Media Absorption	Vaccum Enabled	
Table Pressure	100kg/m ²	
Printable Media	"Glass, Ceramic, PVC, Wood, Metal, Sunboard, Sunpack, Acrylic, MDF, Doors & All Rigid Materials etc."	
Interface	HI SPEED USB 2.0	
Operating System	Win7/10 64bits	
Image Format	TIFF/JPEG/EPS/PDF/AI	
Rip Software	Photoprint DX19, Onyx (optional)	
Power / Maximum Power	AC 220V , 50/60 Hz / >30A; 6.5 KW	
Operational Environment	Temperature : 18°C ~ 22°C, Humidity 35% RH ~ 65% RH	
Dimensions	4620 x 2260 x 1620 (mm)	5322 x 3160 x 1620 (mm)


* Specifications are subjected to change without prior notice. This catalogue is not subjected to any legal proceedings. * Under test conditions. * Actual Images may vary.

Key Features

- ▶ Single color clean
- ▶ Double Negative Pressure
- ▶ Variable Dot Printing
- ▶ White Ink circulation
- ▶ Multi layer Printing
- ▶ ICC profile for all media
- ▶ Auto ink Refill Alarm
- ▶ Easy Operational Software
- ▶ Effect 3D Printing

True Flatbed with Moving Gantry

- ▶ **Advance LED UV lamps** - Printer is Equipped with advance LED Technology of UV lamps, capable of curing quick and all heat sensitive materials It does not required any warm up or cool down time.
- ▶ **Retractable Media Register Pins** - Automated retractable media register pins perfectly position the substrate to facilitate accurate printing
- ▶ **Print Head Safety Remove** - Set of Carriage safety sensors on either side of print carriage to protect valuable print head from hitting media in case of irregularities.
- ▶ **Powerful Vaccum** - A Powerful Vaccum hold substrates flat & firmly in place.
- ▶ **3x powered Panasonic Servo Drive** - 1 Servo Drive for X and 2 Servo Drive for Y for printer stability and longer life.
- ▶ **Wide Color Gamut. High Durability** - HQ+ UV inks dry fast and produce a wide color gamut, enabling the use of a wide variety of materials.



DPI International
Printing Innovations

Sales: +919911873800

Email: sales@dpiprinter.com

Service Locations : PAN India

Support : support@dpiprinter.com

dpiprinters.com